


1/4" Sq. Dr. Sockets For SAE Sheet Metal Screws


6 Point & 6 Point Magnetic, For Predrilled Holes*



| Part Number | Part Number Magnetic | Hex Opening In. | Overall Length (A) | Diameter Nose End (B) | Diameter Drive End (C) | Opening Depth (D) |
|-------------|----------------------|-----------------|--------------------|-----------------------|------------------------|-------------------|
| - | M1E06 | 3/16 | 7/8 | 5/16 | 1/2 | 3/32 |
| - | M1E07 | 7/32 | 7/8 | 3/8 | 1/2 | 5/32 |
| 1E08 | M1E08 | 1/4 | 7/8 | 3/8 | 1/2 | 5/32 |
| 1E10 | M1E10 | 5/16 | 7/8 | 1/2 | 1/2 | 3/16 |
| - | M1E11 | 11/32 | 1 | 1/2 | 1/2 | 3/16 |
| - | M1E12 | 3/8 | 1 | 5/8 | 5/8 | 1/4 |
| - | M1E14 | 7/16 | 1 | 11/16 | 11/16 | 9/32 |
| - | M1E16 | 1/2 | 1 | 11/16 | 11/16 | 11/32 |

*Sockets for predrilled holes are intermediate hardness; sockets for self-drilling and tapping screws are maximum hardness.

6 Point & 6 Point Magnetic, for Self-Drilling and Tapping Screws*



| Part Number | Part Number Magnetic | Hex Opening In. | Overall Length (A) | Diameter Nose End (B) | Diameter Drive End (C) | Opening Depth (D) |
|-------------|----------------------|-----------------|--------------------|-----------------------|------------------------|-------------------|
| 1P06 | M1P06 | 3/16 | 7/8 | 5/16 | 1/2 | 3/32 |
| 1P07 | M1P07 | 7/32 | 7/8 | 3/8 | 1/2 | 5/32 |
| 1P08 | M1P08 | 1/4 | 7/8 | 7/16 | 1/2 | 5/32 |
| - | M1P09 | 9/32 | 7/8 | 1/2 | 1/2 | 3/16 |
| 1P10 | M1P10 | 5/16 | 7/8 | 1/2 | 1/2 | 3/16 |
| 1P11 | M1P11 | 11/32 | 1 | 1/2 | 1/2 | 3/16 |
| 1P12 | M1P12 | 3/8 | 1 | 5/8 | 5/8 | 1/4 |
| 1P14 | M1P14 | 7/16 | 1 | 11/16 | 11/16 | 9/32 |
| 1P16 | M1P16 | 1/2 | 1 | 11/16 | 11/16 | 11/32 |

*Sockets for predrilled holes are intermediate hardness; sockets for self-drilling and tapping screws are maximum hardness.


1/4" Sq. Dr. Sockets For SAE Square Nuts

Single Square & Double Square



| Part Number Square | Part No. Double Square | Hex Opening In. | Overall Length (A) | Diameter Nose End (B) | Diameter Drive End (C) | Opening Depth (D) |
|--------------------|------------------------|-----------------|--------------------|-----------------------|------------------------|-------------------|
| 1608 | 1608-D | 1/4 | 1 | 1/2 | 1/2 | 3/16 |
| 1612 | 1612-D | 3/8 | 1 | 3/4 | 3/4 | 1/4 |

1/4" Square Drive Universal Wrenches, SAE

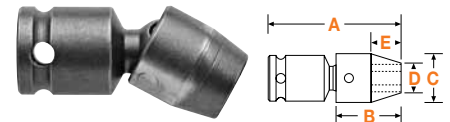

6 Point and Double Hex

| Part Number 6 Point | Part Number Double Hex | Hex Opening In. | Overall Length (A) | Socket Length (B) | Socket Diameter (C) | Nose End Diameter (D) | Clearance Depth (E) |
|---------------------|------------------------|-----------------|--------------------|-------------------|---------------------|-----------------------|---------------------|
| SA-25 | SA-25-D | 1/4 | 1 7/32 | 3/4 | 5/8 | 3/8 | 3/8 |
| SA-26 | SA-26-D | 5/16 | 1 17/32 | 3/4 | 5/8 | 7/16 | 3/8 |
| SA-28 | SA-28-D | 3/8 | 1 19/32 | 13/16 | 5/8 | 17/32 | 7/16 |
| SA-29 | SA-29-D | 7/16 | 1 21/32 | 7/8 | 5/8 | 5/8 | 1/2 |
| SA-30 | SA-30-D | 1/2 | 1 21/32 | 7/8 | 11/16 | 11/16 | 1/2 |
| SA-65 | - | 9/16 | 1 21/32 | 7/8 | 11/16 | 11/16 | 1/2 |

Universal wrenches must not be used with impact drivers. Maximum operating angle is 30°.